

Baphalane Phase I Solar and BESS Project

North-West Province, South Africa



Concept rendering reproduced from the original project presentation

110 MWac

Solar photovoltaic plant

100 MW / 431 MWh

Battery energy storage

132 kV

Grid connection

Project overview, scope, location and duration

EPC development with an approximately 36 km transmission connection

Baphalane Phase I Solar and BESS Project

110 MWac solar PV with 100 MW / 431 MWh battery energy storage

North-West Province, South Africa



Figure 1. Concept rendering of the solar and storage site, reproduced from the supplied presentation. This is an illustration, not an as-built photograph.

Project overview

The Baphalane Phase I project is an independent power producer (IPP) development combining a utility-scale solar photovoltaic plant with battery energy storage. The works include the associated substations, grid connection infrastructure and supporting civil facilities.

Solar PV	110 MWac, including an agrivoltaic area. Approximately 142.7 MWp DC under the current project working baseline.
Battery storage	100 MW / 431 MWh battery energy storage system (BESS).
Grid connection	132 kV connection through the Manama Collector Station to Eskom Spitskop Main Transmission Substation.
Delivery model	Engineering, procurement and construction (EPC).


Project location and participants

Country / Province	South Africa / North-West Province
Municipality	Moses Kotane Local Municipality
Site	Farm Elandsfontein 69 JQ, between Bojating and Ramokokastad, approximately 45 km northeast of Rustenburg.
Employer	WIA BAPHALANE SOLAR FARM DEVELOPMENT (PTY) LTD
EPC contractor	Joint venture of POWERCHINA NORTHWEST ENGINEERING CORPORATION LIMITED and SINOHYDRO SA PROPRIETARY LIMITED.
EPC agreement date	30 October 2025

Transmission connection

For this project introduction, the working transmission description is approximately **36 km of 132 kV overhead line**, comprising about 17 km from the Baphalane site to the Manama Collector Station and about 19 km from Manama to Eskom Spitskop MTS.

The 36 km description follows the planning basis in the supplied Phase I presentation. Final route and length remain subject to written confirmation by the Employer and Eskom.

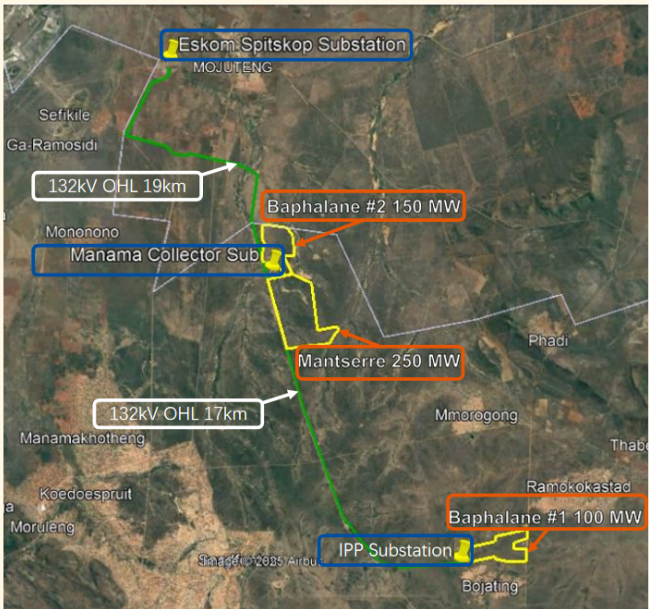

南非巴法拉内光储项目集群规划图

Regional connection context

The original planning map shows the Baphalane Phase I site, the Manama Collector Station and Eskom Spitskop Substation.

It also shows other planned developments in the project cluster. Those developments are outside the Phase I scope described in this document.

The map retains its original labels, including an earlier 100 MW site label. The Phase I solar capacity used in this introduction is 110 MWac.

Figure 2. Original cluster planning map. The 17 km and 19 km labels support the working description for this edition.

Engineering scope and site layout

Solar PV area	110 MWac solar PV facilities, including an agrivoltaic area, inverters, transformers and 33 kV collection infrastructure.
Battery storage area	100 MW / 431 MWh BESS and associated electrical, control, civil and fire protection facilities.
IPP substation	New 33/132 kV step-up substation and associated switching, control and auxiliary facilities.
Collector station	New 132 kV Manama Collector Station and associated facilities.
Spitskop extension	New 132 kV connection bay and related interfaces at Eskom Spitskop MTS.
Transmission line	Approximately 36 km of 132 kV overhead line under the working description for this edition.
Supporting facilities	Operation and maintenance building, access roads, water supply, drainage, flood protection and fire protection facilities.

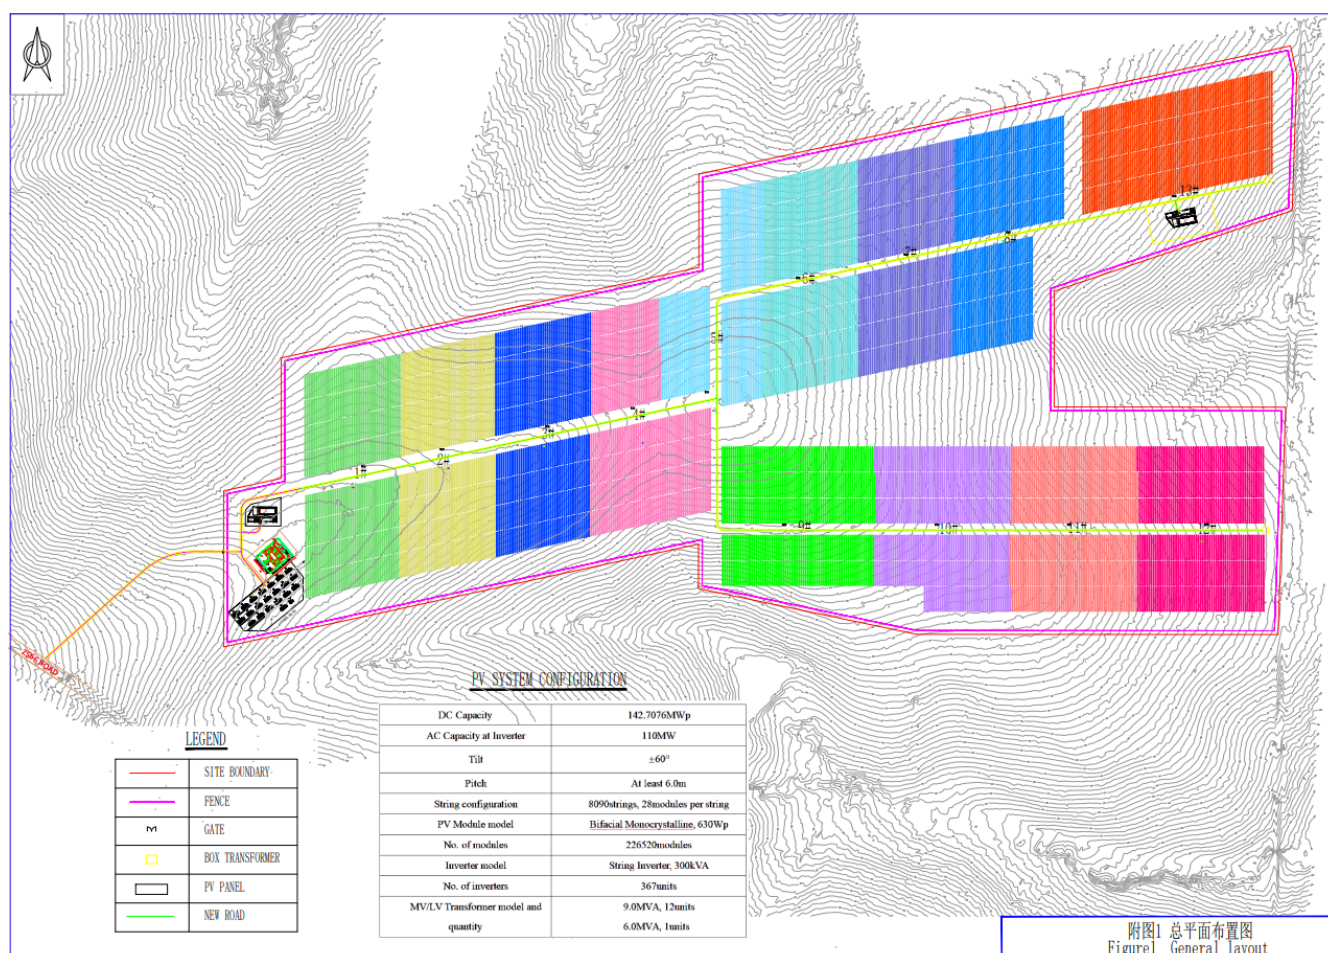


Figure 3. General site layout reproduced from the supplied presentation. The drawing retains its original equipment labels and quantities. Those details are historical drawing content and do not establish the final equipment selection or bill of materials.

Project duration and milestones

The signed EPC agreement defines the completion milestones relative to the **Notice to Proceed (NTP)**. The contractual milestone for Taking Over is **761 days from NTP**, subject to approved contractual adjustments.

Milestone	Days from NTP
Transmission line completion	548
BESS completion	584
PV mechanical completion	587
Spitskop MTS connection completion	597
IPP and switching station completion	638
Manama Collector Station completion	638
Overall project mechanical completion	638
Start of energization	679
Taking Over	761

Programme basis

These are elapsed contractual durations, not fixed calendar completion dates. Calendar dates should follow the formal NTP and any approved amendments or extensions of time. The dates above reproduce the milestone durations in Exhibit C-2 of the signed EPC agreement.

Document basis

1. Supplied Phase I project presentation, R1, August 2026. Used for the project description and original figures.
2. Signed EPC agreement dated 30 October 2025. PDF pages 101-102 identify the execution date and signatories. PDF page 607 contains Exhibit C-2 milestone durations.
3. V6 project technical scope, pages 1-4, and the project parameter register updated 22 September 2026. Used for site location and the working capacity baseline.

Capacity and route details

This introduction describes Phase I only. Capacity figures follow the current project working baseline. Final technical configuration remains subject to approved design and contract changes. The transmission description and its confirmation status appear on page 3.

Prepared: 2 October 2026